




ElectraTough 301-AS Interlocking ESD Tiles

NO Adhesive Required, Easy to Install and In Stock!

Revision Date 3/29/22

For use over any type of hard surface flooring and thin pile glued down carpeting! Loose Lay! Does not require flooring adhesive! ElectraTough is easy to install and features permanent static control properties and low maintenance. ElectraTough is designed to last a lifetime! Move, relocate or expand with ease. ElectraTough is reusable and fully compliant to the latest ANSI/ESD S20.20-2021 Standards.

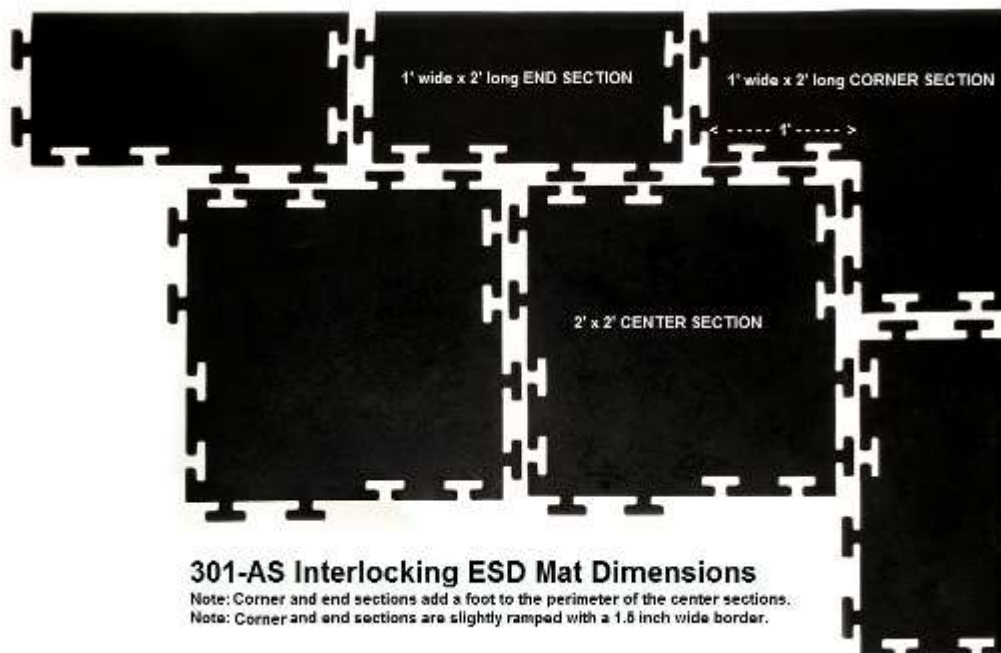

PRODUCT OVERVIEW: ElectraLock 301-AS Interlocking ESD Tiles are an easy to install flooring option used for covering any type of hard surface flooring as well as thin pile glue down carpeting. These tiles are made of rubber and available as center, end and corners pieces. ElectraTough is capable of handling chair caster traffic, carts and heavy items while providing permanent static control properties that are not dependent on humidity for conductivity. ElectraTough easily passes stringent ANSI/ESD S20.20-2021 standards. ElectraTough has a high tech slip resistant top surface and is nearly seamless making it easy to keep clean. Since the entire thickness of the tile is conductive (not just the top surface) grounding the structure is fast and reliable. ElectraTough provides excellent combination resistance results with chairs, carts and personnel. Aluminum grounding foil is provided at no charge with your order. *Please note: on thin pile glue down carpeting small structures may require the use of double sided 2" wide carpet tape around the perimeter (readily available at all hardware stores).



ElectraTough 301-AS Interlocking ESD Tiles

NO Adhesive Required, Easy to Install and In Stock!

Revision Date 3/29/22

- Interlocking tiles. EASY install! Reuse or expand as needed.
- Chair caster and cart friendly. Permanent conductivity.
- Easily handles concrete vapor emissions.
- Absorbs shock, noise and vibration.
- Handles all activity including heavy loads.
- Designed to cover any shape or size of area.
- Safety beveled outside edges. 100% Solid Rubber!
- Will not leave adhesive residues on existing flooring.
- High Tech Pebble finish: great appearance and slip resistant traction. Can be used on all hard surface floors and short pile carpet. Easy discreet grounding, Grounding tape included at NO CHARGE. Resistant to most common chemicals used in the manufacturing environments.

| | |
|-----------|--|
| Thickness | 3/8" (9.52 mm). |
| Color | Black Only |
| Passes | ANSI/ESD S20.20-2021 Footwear / Flooring System |
| Passes | ANSI/ESD STM97.1 (Product Qualification). |
| Passes | ANSI/ESD STM97.2 (Product Qualification). |
| Passes | ESD TR53 Footwear Section / Flooring Section (Compliance Verification) |

Care and Feeding for ElectraTough Tiles: Note: Consider using entry way carpeted clean off mats in doorways to remove contaminants from footwear and carts. Use brooms, dust mops, damp mops, buckets and other cleaning tools dedicated for use on the ESD flooring only. Mark them as "for use in ESD area only."

Maintenance: On a daily basis: Sweep the ElectraTough flooring using a soft bristle broom to remove large abrasives. Use a dry dust mop or shop vac to remove fine dust and dirt. As needed: Should the flooring not respond well to the daily cleaning process, ElectraTough may be damp mopped or auto scrubbed with a dilute solution of ElectraClean and water. Follow the instructions for ElectraClean and observe the associated SDS sheet for safety precautions.

End of document.

Revision History:

Initial Release: 5/25/18 SRC

3/29/2022: Revision, compliant to latest ANSI/ESD S20.20-2021 SRC